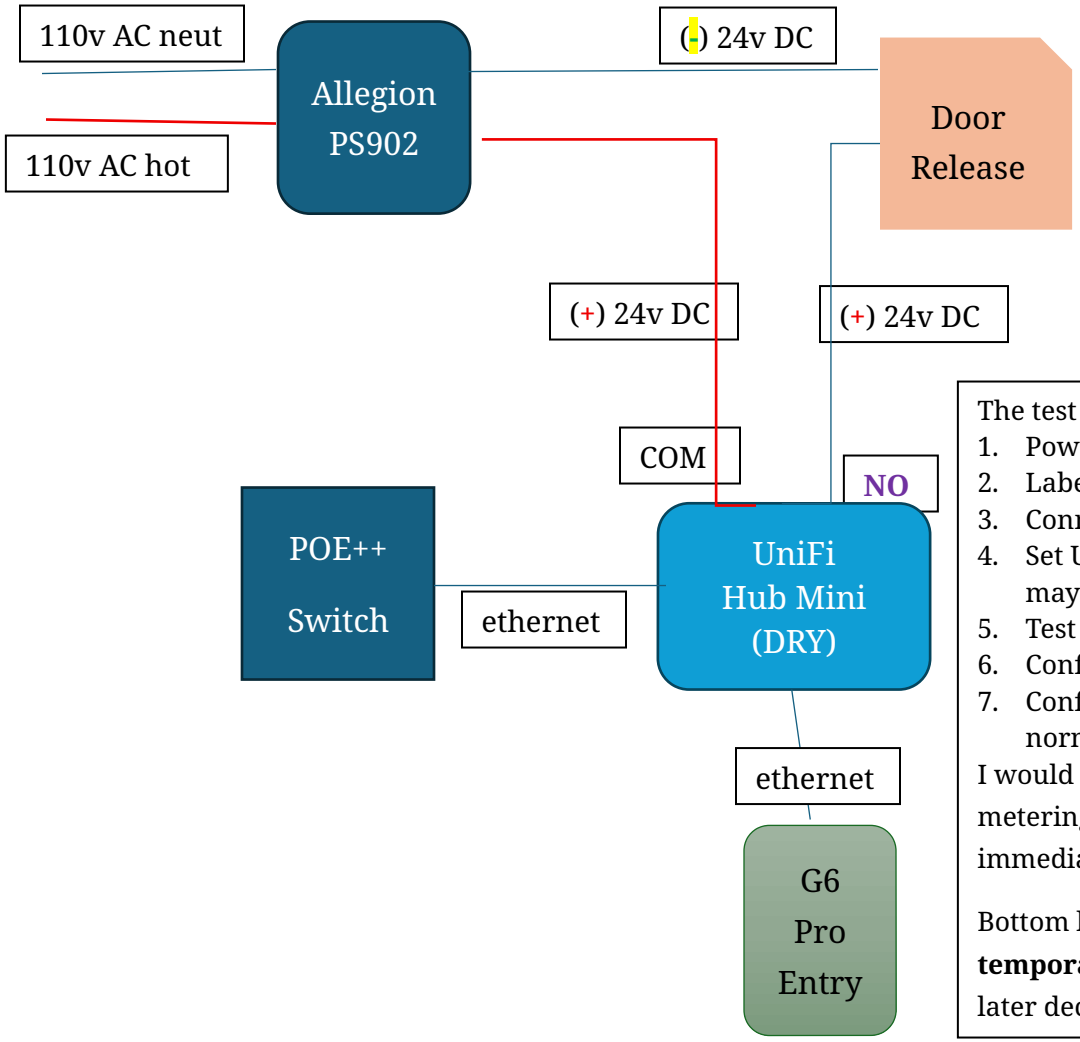


The test process would be:

1. Power down the door release system.
2. Label and remove only the two Aiphone **L/L** wires.
3. Connect them to **Hub Mini DRY COM** + **NO**.
4. Set UniFi unlock duration to a short timed release, maybe **3–5 seconds**.
5. Test while someone is physically at the door.
6. Confirm it locks normally after the timer expires.
7. Confirm inside egress/panic-bar operation still works normally.

I would only try **NC** if **NO does not work** and after metering the circuit. If NC causes the door to unlock immediately or stay released, remove it right away.

Bottom line: **For replacing the Aiphone buzz-in contact temporarily, use NO + COM.** Use **NC + COM** only if you later decide the Hub Mini is directly interrupting power

Installation Manual


JO-1MDW (Master monitor station)
JOS-1AW (A set including JO-1MDW, JO-DA and power supply)
JOS-1VW (A set including JO-1MDW, JO-DV and power supply)
JOS-1FW (A set including JO-1MDW, JO-DVF and power supply)

AIPHONE


Issue date: Aug. 2022 FK2603 Ⓑ P0822 RZ 65030

Part names


JO-1MDW

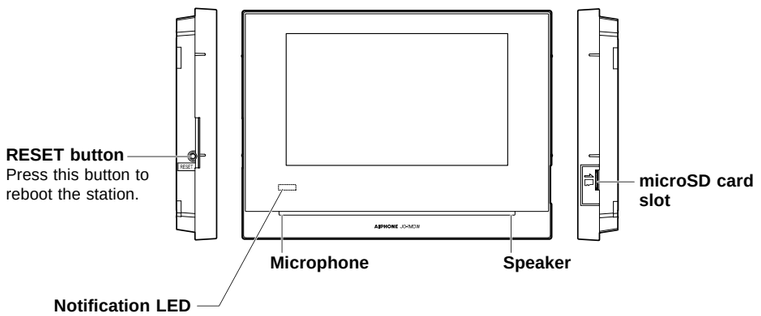


JO-DA

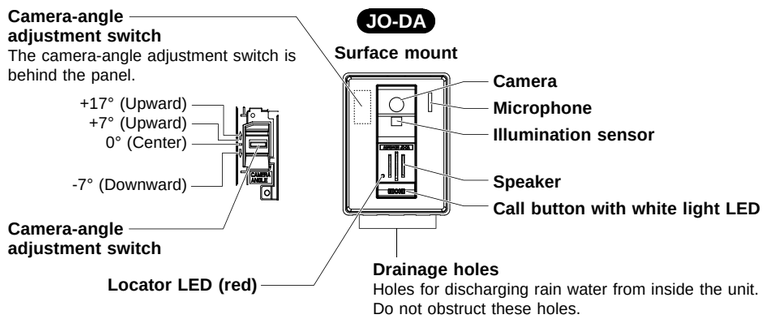

JO-DV

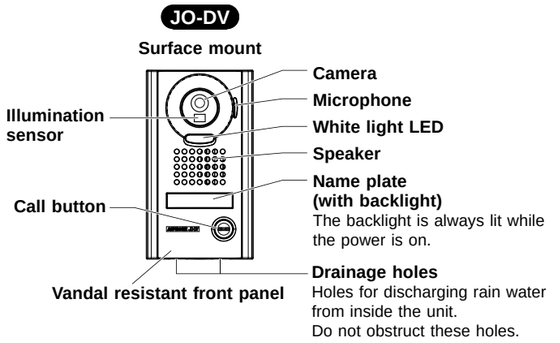

JO-DVF

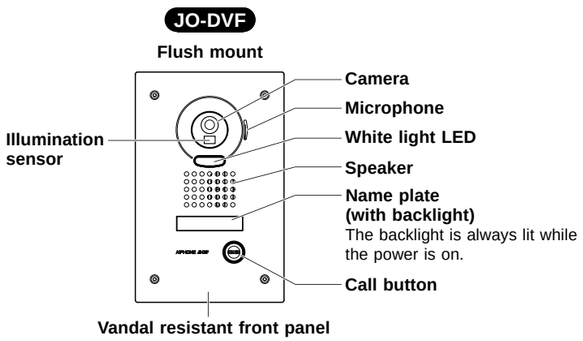

Package contents

	JO-1MDW	JOS-1AW	JOS-1VW	JOS-1FW
JO-1MDW	✓	✓	✓	✓
JO-DA		✓		
JO-DV			✓	
JO-DVF (Flush mount back box; Special screw × 4)				✓
Power supply (PS-1820, PS-1820S, PS-1820UL, PS-1820BF or PS-1820DM)		✓	✓	✓
Installation manual; Information sheet	✓	✓	✓	✓
Special screwdriver			✓	
Special screwdriver (Hexagonal wrench)				✓
Transparent name plate × 2			✓	✓

NOTES:

- Mounting and wood mounting screws not included.
- microSDHC card is not included. Please purchase separately.
- For details on the power supply, see the installation manual of the power supply separately.

Precautions

⚠ Warning

Negligence could result in **death or serious injury**.

1. Do not dismantle or alter the unit. Fire or electric shock could result.
2. Do not use power supply with a voltage other than specified. Fire or electric shock could result.
3. Do not open the case. High voltage is present internally. Electric shock could result.
4. Do not install two power supplies in parallel to single input. Fire or damage to the unit could result.
5. Do not connect any terminal on the unit to AC power line. Fire or electric shock could result.
6. For power supply, use Aiphone power supply model specified for use with system. If non-specified product is used, fire or malfunction could result.

⚠ Caution

Negligence could result in **injury to people or damage to property**.

1. Do not install or make any wire terminations while power supply is plugged in. It can cause electrical shock or damage to the unit.
2. Before turning on power, make sure wires are not crossed or shorted. Fire or electric shock could result.
3. Install the device in a position where it will not easily be brushed against by somebody's shoulder, etc. Failure to do so could result in injury.
4. Do not place your ear close to the speaker during use. It could cause hearing damage.

Precautions for mounting

1. Installing the device in the following locations could cause malfunction:
   - * Locations exposed to direct sunlight
   - * Locations that get hot
     Close to a heater, boiler, etc.
   - * Locations where there is risk of exposure to liquid, dust, oil, or chemicals
   - * Locations with high humidity
     Bathroom, basement, greenhouse, etc.
   - * Locations with low temperature
     Inside a cold storage warehouse, the front of a cooler, etc.
   - * Locations directly exposed to steam or oil smoke
     Next to heating devices or a cooking space, etc.
   - * Sulphurous environments such as a hot spring area
   - * Locations close to the sea or directly exposed to sea breeze
2. In 50Hz regions, if a strong fluorescent light shines directly into the camera, it may cause the image to flicker. Either shield the camera from the light or use an inverter fluorescent light.
3. For running cables, separate them for audio/video and door release and keep them more than 10cm (3-15/16″) away from each other.
4. When using an existing wiring, depending on the type of wiring, it may not operate the system. In case of that, change wiring is required.
5. Do not use the impact driver for mounting. Damage to the unit could result.
6. Avoid installing the master monitor station in concave space of a wall to prevent disconnection of communication.

General Precautions

1. Install low-voltage lines at least 30cm (11″) away from high-voltage lines (AC100V-240V), especially inverter air conditioner wiring. Failure to do so may result in interference or malfunction.
2. When installing or using the device, give consideration to the privacy rights of subjects, as it is the responsibility of the system owner to post signs or warnings in accordance with local ordinances.


Notices

1. Please note that images and illustrations depicted in this manual may differ from the actual ones.
2. Using a mobile phone or professional-use radio equipment such as walkie-talkie close to the system may cause a malfunction.
3. In areas where broadcasting station antennas are close by, the intercom system may be affected by radio frequency interference.
4. Do not install the unit close to an electrical appliance or water heater using a dimmer or inverter, a remote controller of floor heating, etc. Failure to do so may generate a noise causing a malfunction of the unit.
5. When warm indoor air flows into the unit, dew condensation may be caused by a temperature difference between indoors and outdoors. It is recommended to cover openings on the unit such as cable incoming holes to avoid condensation.
6. In areas where microwave is close by, the intercom system may be affected by radio frequency interference.

Installation

Cable

- Use PE (polyethylene)-insulated PVC jacket cable.
  Parallel or jacketed 2-conductor, mid-capacitance non-shielded cable is recommended.




- Never use individual conductors, twisted pair cable or coaxial cable.


To connect low voltage wires, either crimp them with a crimp sleeve or solder them, and then insulate by covering with insulating tape.

[Crimping with a crimp sleeve]

1. Line up solid and stranded conductors, and crimp them.




2. Overlap more than half of the width and twist them at least twice.



[Soldering]

1. Twist the stranded conductor around the solid conductor at least three times.



2. Bend the tip and solder it. Make sure no lead wire sticks out.



3. Overlap more than half of the width and twist them at least twice.




Keep the number of connections as low as possible when wiring.

After connecting wires, always check for breaking or insufficient connection. Especially when connecting a wire in the middle of wiring, either crimp it with a crimp sleeve or solder it, and then insulate it by covering with insulating tape.

Just twisting wires may cause poor connection, or the surface of the wires may get oxidized and cause a loose connection, leading to malfunctioning or failure.




- **When using existing cables**
  Check for short circuit and disconnection before installation.



Disconnection check (6Ω or less)


Connect the ends of one side and make a measure at the other side with a tester.



Short circuit check: ∞Ω (Infinity)



Wiring method, wiring distance

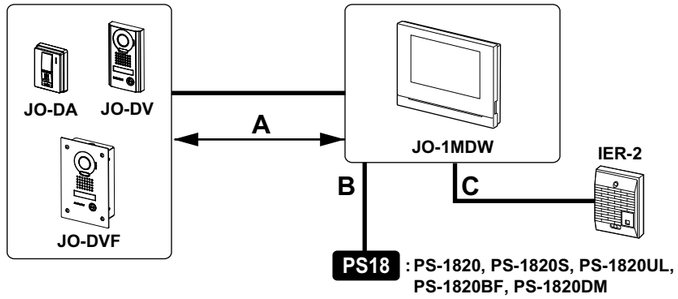


	Ø 0.65 mm	22 AWG	Ø 0.8-1.2 mm	20-16 AWG
A	50 m	165′	100 m	330′
B	5 m	16′	10 m	33′
C	50 m	165′	150 m	490′

Mounting locations

JO-DA, JO-DV, JO-DVF


Do not install the door station in any of the following locations where lighting or the ambient environment could impact the camera of the unit.

- Where lights will be shining directly into the camera night time
- Where the sky fills much of the background
- Where the background of the subject is white.
- Where sunlight or other strong light sources will shine directly into the camera

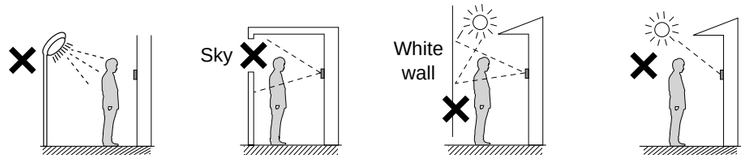


JO-1MDW


- Do not install the master monitor station at a location exposed to direct sunlight.



- Avoid installing the master monitor station in a concave space of a wall to prevent audio distortion.



- Make sure to leave at least the specified spaces on all sides to prevent malfunction and audio distortion.




- Do not embed the master monitor station inside a wall.
- The reset button is on the left side and the microSDHC card slot is on the right side of the master monitor station. Be sure to install the station at a location where all buttons can be reached by hand.
- Install the master monitor station more than 3meters apart from all wireless equipment.

Mounting positions and image view area


JO-DA, JO-DV, JO-DVF

Horizontal




Vertical

Camera angle: 0°




JO-DA only : Refer to the diagrams below when the camera angle is changed with the adjustment switch.

Camera angle: 7°




Camera angle: 17°




Camera angle: −7°

(When the station is at a high position due to a step)



Wi-Fi installation requirements

The master monitor station incorporates wireless LAN antennas. The Wi-Fi signal may not reach the master monitor station depending on the installation environment such as wall materials or the number of walls. Make sure the master monitor station receives a Wi-Fi signal successfully before installing the master monitor station. If the Wi-Fi signal does not reach the master station, change the installation location of the router or the master station.

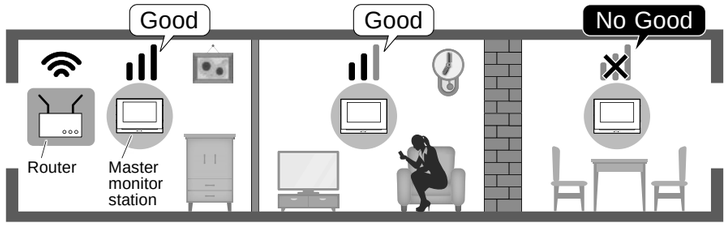

- Partition masonry walls
- Wood walls
- Plasterboard walls

- Reinforced concrete walls
- Load-bearing walls
- Stone walls
- Metal walls

Installation Manual

JO-1MDW (Master monitor station)
JOS-1AW (A set including JO-1MDW, JO-DA and power supply)
JOS-1VW (A set including JO-1MDW, JO-DV and power supply)
JOS-1FW (A set including JO-1MDW, JO-DVF and power supply)

AIPHONE


Issue date: Aug. 2022 FK2603 Ⓑ P0822 RZ 65030

Mounting

JO-1MDW

The installation height of the equipment should not exceed more than 2m (Upper Edge) from the ground level.


<Back wiring>

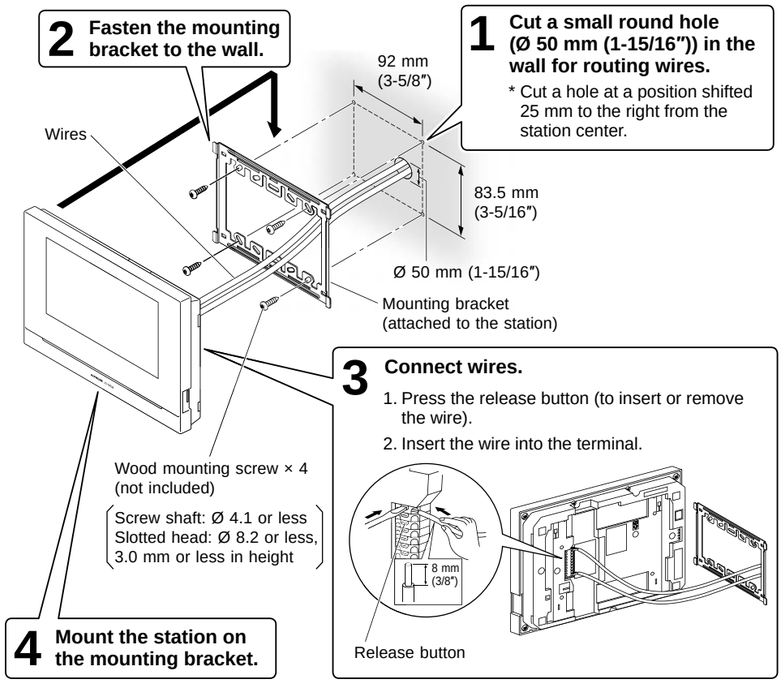

NOTE: When using a gang box, select a 3-gang box.


<Surface wiring>

The wires can be routed to the top or bottom of the station.
Cut the cable inlet to allow passage of the wiring into the station from the top or bottom of the station.
If there is a large amount of wiring, strip away the jacket of the wire up to the cable inlet.

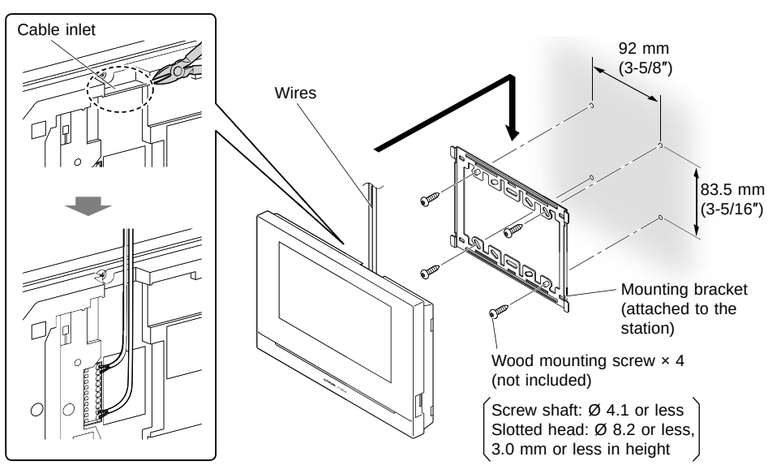


When wood mounting screws cannot be used for plasterboard walls, concrete walls and so on, use commercially-available board anchors or concrete plugs.

(e.g.)




Use cable molding for the power wire and weak electric wires. A bare wire part between the station and cable molding should be 80 mm or less.




JO-DA

<Back wiring>

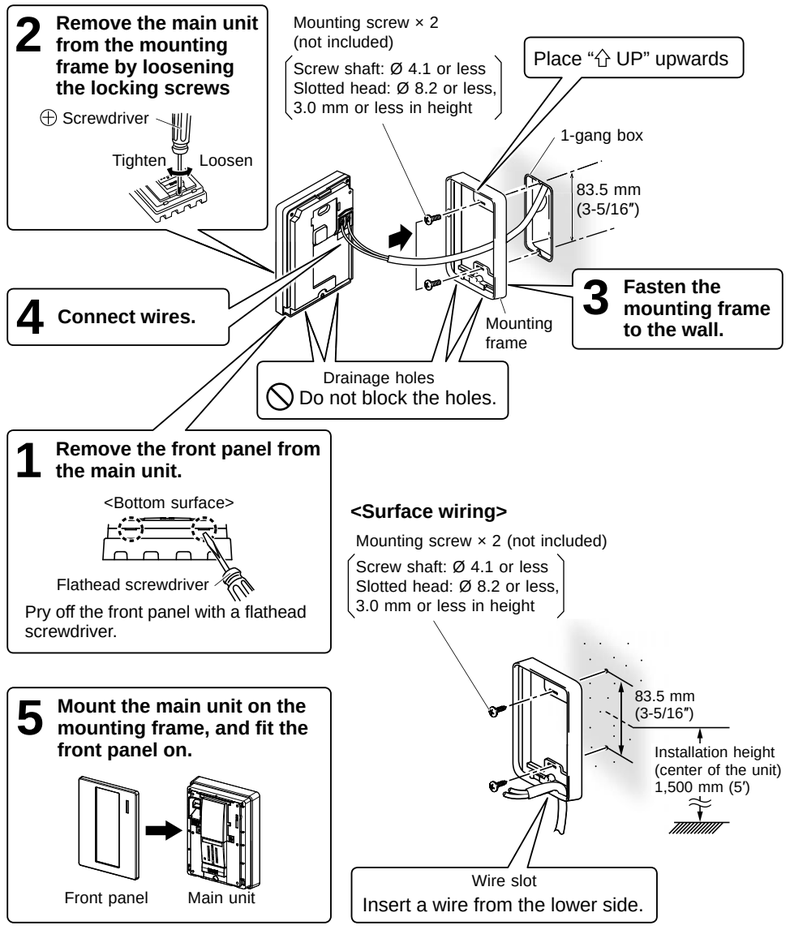


<Surface wiring>

JO-DV

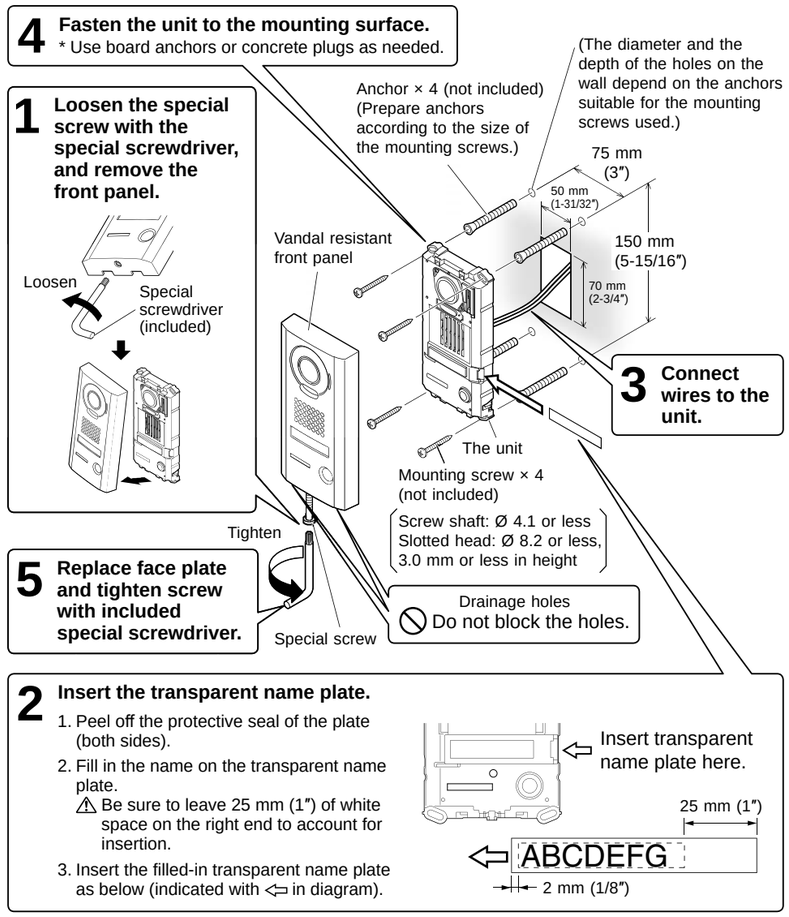


JO-DVF

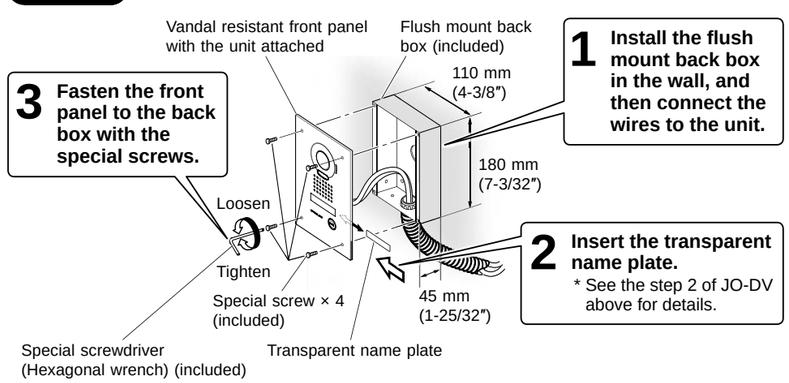


Wiring

Insert wires securely into each terminal as shown below.

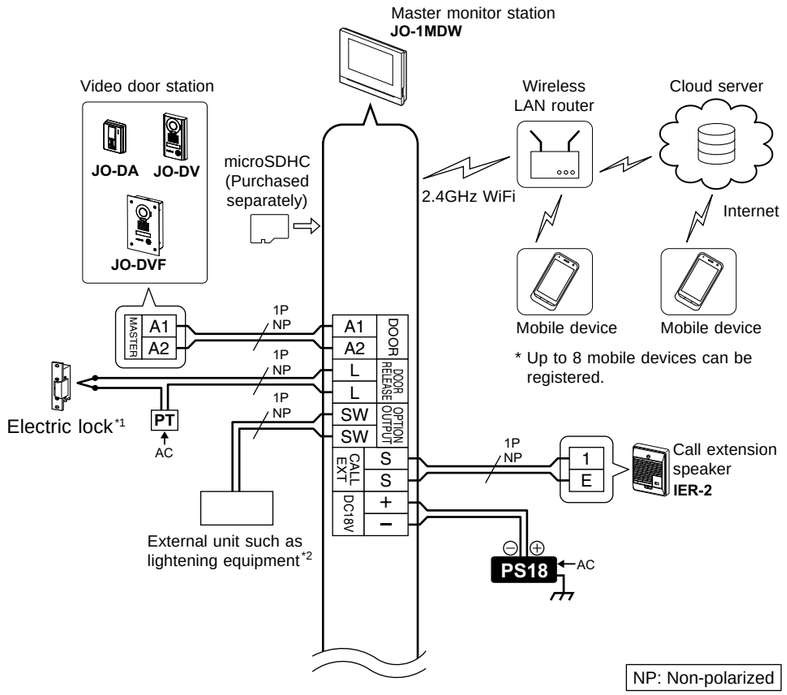

PS18 : Power supply

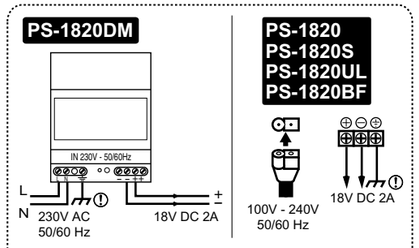

*1: An EL-12S (AC 12 V, 0.125 A, DC 12 V, 0.2 A) or equivalent part and a separate AC transformer (or power supply) are required.
Door release contact: AC/DC 24 V, 1 A (Minimum contact: 100 mV DC, 0.1 mA) (N/O dry closure contact L, L).
* Run separate cables for audio/video and door release.

*2: AC/DC 24V, 1A N/O dry closure contact (Minimum contact: 100mV DC, 0.1mA)

Technical precautions

Cleaning:

- Clean all units with a soft cloth and gentle cleaner. Do not spray cleaner directly on unit. Do not use an abrasive cleaner or cloth.
- Video door stations are weather resistant.

Wiring:

- If a short is detected between A1 and A2 of the door station, the unit stops functioning and the Status LED flashes rapidly until the short is removed. Check the wires.
- If noise is heard from the master monitor station, the wiring is disconnected between the video door station and the master monitor station.

Trouble:

- If the station does not respond, reboot the station by pressing the RESET button.

Regulations

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

INDUSTRY CANADA

CAN ICES-3 (B)/NMB-3(B)

WEEE

The object area of is the EU.

Warranty

Aiphone warrants its products to be free from defects of material and workmanship under normal use and service for a period of 2 years after delivery to the ultimate user and will repair free of charge or replace at no charge, should it become defective upon which examination shall disclose to be defective and under warranty. Aiphone reserves unto itself the sole right to make the final decision whether there is a defect in materials and/or workmanship; and whether or not the product is within the warranty. This warranty shall not apply to any Aiphone product which has been subject to misuse, neglect, accident, power surge, or to use in violation of instructions furnished, nor extended to units which have been repaired or altered outside of the factory. This warranty does not cover batteries or damage caused by batteries used in connection with the unit. This warranty covers bench repairs only, and any repairs must be made at the shop or place designated in writing by Aiphone. This warranty is limited to the standard specifications listed in the operation manual. This warranty does not cover any supplementary function of a third party product that is added by users or suppliers. Please note that any damage or other issues caused by failure of function or interconnection with Aiphone products is also not covered by this warranty. Aiphone will not be responsible for any costs incurred involving on site service calls. Aiphone will not provide compensation for any loss or damage incurred by the breakdown or malfunction of its products during use, or for any consequent inconvenience or losses that may result.

AIPHONE®

Providing Peace of Mind

https://www.aiphone.net/

AIPHONE CO., LTD., NAGOYA, JAPAN

Quote Request – Update Church Entry System with UniFi Access

From: Sys Admin (bblackford@mcknightcrossings.org)

To: info@h-gsales.com

Cc: bblackford@mcknightcrossings.org

Date: Sunday, May 10, 2026 at 11:41 AM CDT

H&G Schultz Door Team,

H&G Schultz previously installed the automatic door entry system at McKnight Crossings Church of Christ, located at 2515 S. McKnight Road, St. Louis, MO 63124. The current system still works and includes the exterior keypad, reception/front desk buzz-in capability, and related door lock/release hardware.

We are now interested in updating the system to a more modern access control setup that integrates with our UniFi system. Specifically, we would like a quote to replace or update the current entry system using a **UniFi G6 Pro Entry** system, with support for entry by face recognition, G6 Pro keypad/PIN, QR code, and front desk remote release.

Could you please provide a quote for the necessary parts, installation labor, and any recommended changes to the existing door hardware, power supply, latch retraction, wiring, or panic hardware? We would also appreciate your assessment of whether the existing door hardware can be reused or whether it should be replaced as part of the upgrade.

A few items we would like the quote to address:

1. Compatibility with the existing exterior door and panic bar hardware.
2. Whether the existing power supply, latch retraction kit, and door cord can be reused.
3. Installation of the UniFi entry device, or comparable UniFi-compatible components if you recommend a different configuration.
4. Ability for the front desk/reception area to remotely unlock the door.
5. Any network, low-voltage wiring, or coordination requirements with our church IT setup.
6. Any options for retaining the current system temporarily during the transition.

I have attached the prior H&G Schultz quote from 2019 for reference. Please let me know if someone should come onsite to review the existing installation before preparing the quote.

Thanks,

Bret Blackford
McKnight Crossings Church of Christ
2515 S. McKnight Road
St. Louis, MO 63124



HnG-Schultz-Door_Quote 311570.pdf
20.9 KB

H&G / SCHULTZ DOOR

11635 Lackland Rd.
St. Louis, MO 63146
Tel: (314) 432-8188 Fax: (314) 432-0649

Quote

Quote # : **311570**
Quote Date : **May 21, 2019**
Expiration Date : **Jun 20, 2019**

Customer:

End User COD
Payment Due at Order Placement
Saint Louis, MO 63146

Ship To:

McKnight Crossings Church of Christ
2515 S. McKnight Road
St Louis, MO 63124

Account Code : 10292
Terms : CASH
Customer Job # :
Salesperson : Josh Duncan
Order Name : McKnight Crossings -

Purchase Order # : Check
Shipped Via : Technician Delivery

OPTION #1 BELOW - Install release button at reception desk, Install Power Supply in office area (location TBD), Install Motorized Latch Retraction kit in existing panic bar at door / power transfered to door via door cord - This option allows for remote release of door via push button

OPTION #2 - ADD KEYPAD (model# AC-10S) to exterior of door to allow entry via valid pin code - ADD $335.00 + Tax to OPTION #1

OPTION #3 - ADD AIPHONE VIDEO INTERCOM (Model# JOS-1VW) to exterior of door to allow for 2-way communication with reception and video of exterior at reception, inside station will can unlock door via touchscreen monitor on unit or mobile app - ADD $1,000.00 + Tax to OPTION #1

Qty	Product Description
1	RELEASE BUTTON ALARM CONTROLS TS-18
1	Power Supply PS902 (OSEL055)
1	Door Cord TSB-C
1	MLR SDC LR100VDK
8	Carpenter Door/Frame/HDWE Installation (LBRC)

Pre-Tax Total	:	1,660.00
15 - MO Tax	:	0.00
Quote Total	**:**	**1,660.00**

Terms and Conditions

1. Prices quoted are F.O.B. shipping point, freight allowed to jobsite. No sales or use tax included. (The price or prices stated in this proposal are based on prices for component materials, labor rates applicable to fabrication and freight rates in effect as of the date of this proposal).

2. Terms of payment. Net 30 days subject to credit approval at time of order with no retention withheld. Past due accounts are subject to 1-1/2% per month service charge.

3. H&G/Schultz Door reserve the right to add a surcharge to any invoice paid with a credit card.

4. Delays in ordering, shipping, etc. may result in additional costs.

5. This Proposal is void if not accepted within 30 days.
Acceptance terms are receipt of an executed copy of this proposal or an Owner/Contractor's executed purchase order with mutually agreed upon terms.

6. For purposes of this Proposal, the entity accepting this Proposal shall be referred to as the "Owner/Contractor".

7. H&G/Schultz Door is not responsible for providing any related or unrelated products that may or may not be made of similar materials to those being bid unless specifically indicated, but is only responsible for providing of the specific items listed in this Proposal at the quoted prices. Further, in the event the terms of the final construction documents for the above project differ from the specifications, plans and addenda submitted to H&G/Schultz Door prior to the preparation of this Proposal, H&G/Schultz Door is only required to perform under the terms of this Proposal and not the terms of final construction documents. The parties to this Proposal agree that the terms of this Proposal shall be incorporated into the final construction contract as if fully set forth therein.

8. Prices for additional materials requested by Owner/Contractor not included in this proposal may vary from the prices quoted in this Proposal due to changes in market conditions.

9. H&G/Schultz Door is not responsible for any product listed only on Mechanical or Electrical drawings and not listed on architectural plans.

10. The information contained in this Proposal and the rights of each party under this Proposal are personal to that party and may not be assigned, transferred, or used by any other person, firm, corporation, or other party without the prior, express, and written consent of the other party.

11. The failure of either party to this Proposal to insist upon the performance of any of the terms and conditions of this Proposal, or the waiver of any breach of any of the terms and conditions of this Proposal, shall not be constructed as thereafter waiving any such terms and conditions, but the same shall continue and remain in full force and effect as if no such forbearance or waiver had occurred.

12. H&G/Schultz Door shall not be responsible for claims arising out of improperly drawn blueprints, plans, specifications, architectural drawings or the acts or failure to act of the Owner/Contractor, other contractors, subcontractors, engineers, architects, material suppliers or other agents or employees of the Owner/Contractor; nor shall H&G/Schultz Door be responsible for damages to persons or property occasioned by the Owner/Contractor or other contractors, subcontractors, engineers, architects, material suppliers or other agents or employees of the Owner/Contractor, third parties, fire, explosion, accidents, flood, strikes, shortages, acts of God or other happenings beyond its control. The Owner/Contractor shall hold and save H&G/Schultz Door completely harmless from, and shall indemnify H&G/Schultz Door against all claims, demands, actions, causes of action, costs, damages, losses, and expenses, including, but not limited to, claims arising from delay of the project, claims arising out of the injury or death of any person, claims arising out of lost profits or income, claims arising out of property damage, claims arising from causes enumerated in this paragraph, including judgments and reasonable attorney's fees.

13. In the event that any action is filed in relation to this Proposal, the unsuccessful party in the action shall pay to the successful party, a reasonable sum for the successful party's attorney's fees.

14. H&G/Schultz Door policy is not to accept any material returns except for defective material or a sellers ordering error. All material purchased from H&G/Schultz Door is considered special order material and may not be returned for credit. Excess material purchased by the buyer is the buyer's responsibility.

15. In the event any of the materials supplied by H&G/Schultz Door are incorrect or defective, the liability of H&G/Schultz Door for the incorrect or defective material is limited to the replacement or repair of the defective material and not for any incidental or consequential damages suffered by Owner/Contractor or a third party. H&G/Schultz Door must be notified of any product defects or incorrect materials prior to installation and shall be given the option to repair or replace any defective or incorrect products. H&G/Schultz Door will not be responsible for any back charges from Owner/Contractor or a third party for the repair, replacement, or omission of any products unless specifically agreed to in writing prior to the performance of the work.

16. In the event H&G/Schultz Door ships materials to Owner/Contractor under the terms of this Proposal and Owner/Contractor accepts such materials, and, at a later date, Owner/Contractor and H&G/Schultz Door fail to enter into

a final contract for the above-referenced project, Owner/Contractor shall pay H&G/Schultz Door for all materials shipped and accepted by Owner/Contractor and for any liability arising from any materials placed on order at Owner/Contractor's instructions at the prices contained in this proposal.

17. Once Owner/Contractor accepts this proposal, the Owner/Contractor is liable for all materials and services as detailed in the specifications section of the agreement. Any changes to the terms and/or specifications must be agreed by both parties.

18. H&G/Schultz Door does not include finish paint, finish stain, glass, glazing, hardware or installation unless noted.

19. This proposal is contingent upon credit approval from H&G/Schultz Door. H&G/Schultz Door reserves the right to approve or refuse credit to the Owner/Contractor based on H&G/Schultz Door determination of credit worthiness. If H&G/Schultz Door is unwilling to approve credit to the Owner/Contractor and other payment arrangements cannot be agreed by the parties this proposal will be considered null and void.

20. Reasonable doubt of the Owner/Contractor's financial responsibility shall entitle H&G/Schultz Door to stop or decline shipment, until Owner/Contractor has satisfied H&G/Schultz Door of its financial responsibility.

21. Unless otherwise specified our prices are based on the customer supplying us with one complete set of plans, specifications and all addenda at No Charge, for preparation of shop drawings and schedules for approval.

22. Product lead times in this proposal are estimated and based on historical average and are for reference only and do not guarantee delivery on or before such date unless otherwise specified.

23. Adverse wall and/or floor conditions not visible during field survey may result in additional charges.

24. Disposal of original material is the responsibility of the Owner/Contractor.

25. Doors and Frames in facilities built prior to 1978 may contain lead based paint. EPA regulations require specific criteria be met in the removal and disposal of these products. Unless specified, additional charges will apply if the presence of lead is detected.

Customer Signature:_____ Date:_____

Salesman Signature:_____ Date:_____

Quote Request – Add UniFi Access to Existing Church Entry Door

From: Sys Admin (bblackford@mcknightcrossings.org)

To: info@stlalarmco.com

Cc: bblackford@mcknightcrossings.org

Date: Sunday, May 10, 2026 at 11:54 AM CDT

St. Louis Alarm Co. Team,

McKnight Crossings Church of Christ is interested in getting a quote to update the access control system for our main entry door.

We already have a UniFi ecosystem in place at the church, including UniFi networking and security equipment, and we would like to add UniFi Access rather than install a separate access control platform. Specifically, we are considering a **UniFi G6 Pro Entry** / UniFi Access setup that would allow entry by facial recognition, keypad/PIN, QR code, and front desk remote release.

Our current door entry system still works, but it is older. It currently allows entry through an exterior keypad and also allows front desk staff to buzz visitors in. I have attached the prior H&G Schultz quote from 2019 so you can see the existing door release, keypad, panic bar/latch retraction, power supply, and intercom-related hardware that was installed or quoted at that time. We are providing that only as background on the existing system, not as a scope that needs to be matched line-for-line.

Could you please let us know whether St. Louis Alarm Co. is comfortable quoting and installing a UniFi Access solution, including any needed door hardware, low-voltage wiring, and integration with our existing UniFi environment?

A few items we would like the quote to address:

1. Whether the existing door hardware, power supply, latch retraction kit, and door cord can be reused.
2. What UniFi Access components you would recommend for this door.
3. Whether the existing keypad/intercom would be removed, replaced, or left temporarily during transition.
4. Any network, PoE, low-voltage wiring, or cabling requirements.
5. Whether an onsite review would be needed before preparing a final quote.

The church is located at:

McKnight Crossings Church of Christ
2515 S. McKnight Road
St. Louis, MO 63124

Please let me know the best next step, and whether someone from your team should come onsite to review the existing installation.

Thanks,

Bret Blackford
McKnight Crossings Church of Christ
2515 S. McKnight Road
St. Louis, MO 63124



HnG-Schultz-Door_Quote 311570.pdf
20.9 KB

H&G / SCHULTZ DOOR

11635 Lackland Rd.
St. Louis, MO 63146
Tel: (314) 432-8188 Fax: (314) 432-0649

Quote

Quote # : **311570**
Quote Date : **May 21, 2019**
Expiration Date : **Jun 20, 2019**

Customer:

End User COD
Payment Due at Order Placement
Saint Louis, MO 63146

Ship To:

McKnight Crossings Church of Christ
2515 S. McKnight Road
St Louis, MO 63124

Account Code : 10292
Terms : CASH
Customer Job # :
Salesperson : Josh Duncan
Order Name : McKnight Crossings -

Purchase Order # : Check
Shipped Via : Technician Delivery

OPTION #1 BELOW - Install release button at reception desk, Install Power Supply in office area (location TBD), Install Motorized Latch Retraction kit in existing panic bar at door / power transfered to door via door cord - This option allows for remote release of door via push button

OPTION #2 - ADD KEYPAD (model# AC-10S) to exterior of door to allow entry via valid pin code - ADD $335.00 + Tax to OPTION #1

OPTION #3 - ADD AIPHONE VIDEO INTERCOM (Model# JOS-1VW) to exterior of door to allow for 2-way communication with reception and video of exterior at reception, inside station will can unlock door via touchscreen monitor on unit or mobile app - ADD $1,000.00 + Tax to OPTION #1

Qty	Product Description
1	RELEASE BUTTON ALARM CONTROLS TS-18
1	Power Supply PS902 (OSEL055)
1	Door Cord TSB-C
1	MLR SDC LR100VDK
8	Carpenter Door/Frame/HDWE Installation (LBRC)

Pre-Tax Total	:	1,660.00
15 - MO Tax	:	0.00
Quote Total	**:**	**1,660.00**

Terms and Conditions

1. Prices quoted are F.O.B. shipping point, freight allowed to jobsite. No sales or use tax included. (The price or prices stated in this proposal are based on prices for component materials, labor rates applicable to fabrication and freight rates in effect as of the date of this proposal).

2. Terms of payment. Net 30 days subject to credit approval at time of order with no retention withheld. Past due accounts are subject to 1-1/2% per month service charge.

3. H&G/Schultz Door reserve the right to add a surcharge to any invoice paid with a credit card.

4. Delays in ordering, shipping, etc. may result in additional costs.

5. This Proposal is void if not accepted within 30 days.
Acceptance terms are receipt of an executed copy of this proposal or an Owner/Contractor's executed purchase order with mutually agreed upon terms.

6. For purposes of this Proposal, the entity accepting this Proposal shall be referred to as the "Owner/Contractor".

7. H&G/Schultz Door is not responsible for providing any related or unrelated products that may or may not be made of similar materials to those being bid unless specifically indicated, but is only responsible for providing of the specific items listed in this Proposal at the quoted prices. Further, in the event the terms of the final construction documents for the above project differ from the specifications, plans and addenda submitted to H&G/Schultz Door prior to the preparation of this Proposal, H&G/Schultz Door is only required to perform under the terms of this Proposal and not the terms of final construction documents. The parties to this Proposal agree that the terms of this Proposal shall be incorporated into the final construction contract as if fully set forth therein.

8. Prices for additional materials requested by Owner/Contractor not included in this proposal may vary from the prices quoted in this Proposal due to changes in market conditions.

9. H&G/Schultz Door is not responsible for any product listed only on Mechanical or Electrical drawings and not listed on architectural plans.

10. The information contained in this Proposal and the rights of each party under this Proposal are personal to that party and may not be assigned, transferred, or used by any other person, firm, corporation, or other party without the prior, express, and written consent of the other party.

11. The failure of either party to this Proposal to insist upon the performance of any of the terms and conditions of this Proposal, or the waiver of any breach of any of the terms and conditions of this Proposal, shall not be constructed as thereafter waiving any such terms and conditions, but the same shall continue and remain in full force and effect as if no such forbearance or waiver had occurred.

12. H&G/Schultz Door shall not be responsible for claims arising out of improperly drawn blueprints, plans, specifications, architectural drawings or the acts or failure to act of the Owner/Contractor, other contractors, subcontractors, engineers, architects, material suppliers or other agents or employees of the Owner/Contractor; nor shall H&G/Schultz Door be responsible for damages to persons or property occasioned by the Owner/Contractor or other contractors, subcontractors, engineers, architects, material suppliers or other agents or employees of the Owner/Contractor, third parties, fire, explosion, accidents, flood, strikes, shortages, acts of God or other happenings beyond its control. The Owner/Contractor shall hold and save H&G/Schultz Door completely harmless from, and shall indemnify H&G/Schultz Door against all claims, demands, actions, causes of action, costs, damages, losses, and expenses, including, but not limited to, claims arising from delay of the project, claims arising out of the injury or death of any person, claims arising out of lost profits or income, claims arising out of property damage, claims arising from causes enumerated in this paragraph, including judgments and reasonable attorney's fees.

13. In the event that any action is filed in relation to this Proposal, the unsuccessful party in the action shall pay to the successful party, a reasonable sum for the successful party's attorney's fees.

14. H&G/Schultz Door policy is not to accept any material returns except for defective material or a sellers ordering error. All material purchased from H&G/Schultz Door is considered special order material and may not be returned for credit. Excess material purchased by the buyer is the buyer's responsibility.

15. In the event any of the materials supplied by H&G/Schultz Door are incorrect or defective, the liability of H&G/Schultz Door for the incorrect or defective material is limited to the replacement or repair of the defective material and not for any incidental or consequential damages suffered by Owner/Contractor or a third party. H&G/Schultz Door must be notified of any product defects or incorrect materials prior to installation and shall be given the option to repair or replace any defective or incorrect products. H&G/Schultz Door will not be responsible for any back charges from Owner/Contractor or a third party for the repair, replacement, or omission of any products unless specifically agreed to in writing prior to the performance of the work.

16. In the event H&G/Schultz Door ships materials to Owner/Contractor under the terms of this Proposal and Owner/Contractor accepts such materials, and, at a later date, Owner/Contractor and H&G/Schultz Door fail to enter into

a final contract for the above-referenced project, Owner/Contractor shall pay H&G/Schultz Door for all materials shipped and accepted by Owner/Contractor and for any liability arising from any materials placed on order at Owner/Contractor's instructions at the prices contained in this proposal.

17. Once Owner/Contractor accepts this proposal, the Owner/Contractor is liable for all materials and services as detailed in the specifications section of the agreement. Any changes to the terms and/or specifications must be agreed by both parties.

18. H&G/Schultz Door does not include finish paint, finish stain, glass, glazing, hardware or installation unless noted.

19. This proposal is contingent upon credit approval from H&G/Schultz Door. H&G/Schultz Door reserves the right to approve or refuse credit to the Owner/Contractor based on H&G/Schultz Door determination of credit worthiness. If H&G/Schultz Door is unwilling to approve credit to the Owner/Contractor and other payment arrangements cannot be agreed by the parties this proposal will be considered null and void.

20. Reasonable doubt of the Owner/Contractor's financial responsibility shall entitle H&G/Schultz Door to stop or decline shipment, until Owner/Contractor has satisfied H&G/Schultz Door of its financial responsibility.

21. Unless otherwise specified our prices are based on the customer supplying us with one complete set of plans, specifications and all addenda at No Charge, for preparation of shop drawings and schedules for approval.

22. Product lead times in this proposal are estimated and based on historical average and are for reference only and do not guarantee delivery on or before such date unless otherwise specified.

23. Adverse wall and/or floor conditions not visible during field survey may result in additional charges.

24. Disposal of original material is the responsibility of the Owner/Contractor.

25. Doors and Frames in facilities built prior to 1978 may contain lead based paint. EPA regulations require specific criteria be met in the removal and disposal of these products. Unless specified, additional charges will apply if the presence of lead is detected.

Customer Signature:_____ Date:_____

Salesman Signature:_____ Date:_____